



Fire Protective Safety Wired Glass Protect3™

Material


- 1/4" (6mm) thick
- Fits standard L-FRA100 and L-GLF100 Lite kits
- 3/4" X 3/4" Diamond pattern electrically welded steel wire mesh
- Heavy duty fire-rated and impact-safety rated film
- Maintains integrity when fractured or subjected to a hose stream
- Etched with UL classification on each piece
- Weight: 3.6 lbs./sq. ft.
- STC 28 rating

Fire-rating information:

- Certified by UL to ANSI/UL 9, ANSI/UL10B, ANSI/UL10C, CAN/ULC-S104, ULC CAN4-S106 with closed cell PVC foam glazing tape like NGP GT-116, GT-118, GT-132 or GT-316

Impact Safety Rating Information:

Meets ANSI Z97.1, Class A
 Meets CPSC 16CFR 1201 (Category I and II)
 Complies with IBC requirements for use in doors, side-lites, transom lites and borrowed lites.

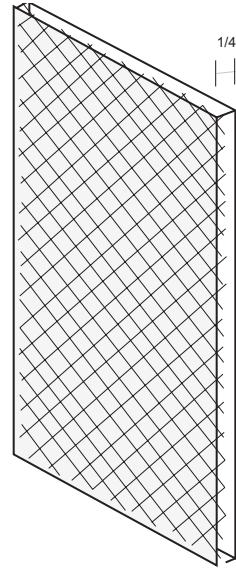

Project:
Submitted by:
Date:
Notes:

Rating	Application	Max. Visible Glass Area (Sq. Inches)	Max. Width Visible Glass	Max. Height Visible Glass
20, 45 Minute	Doors*, Borrowed lites	1,296	54"	54"
60, 90 Minute	Doors*	100	12"	33"

*with fire-rated glass Lite kit