

KRM Key Removable Mullion




Top Retainer



Bottom Retainer



Headcap Assembly

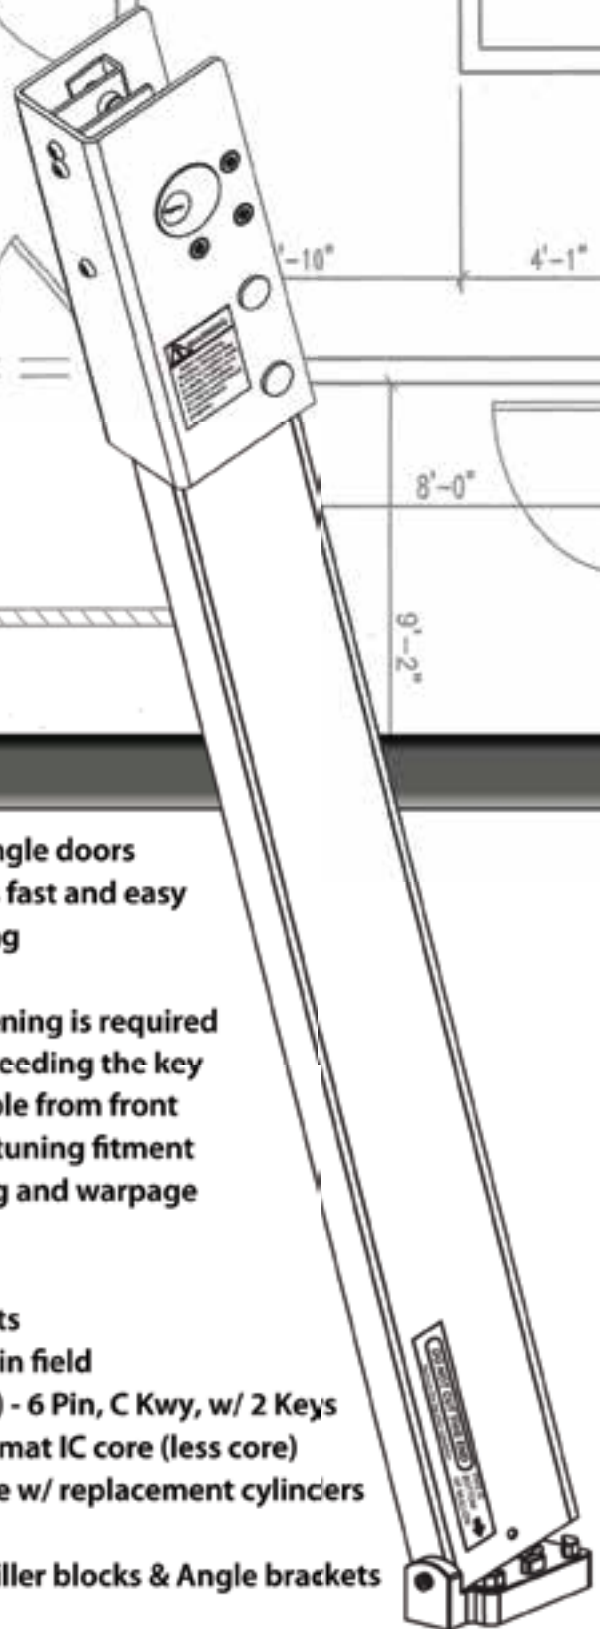

Specifications

Application : Used to adapt a double door into two single doors

Key Operation : Turning key in mortise cylinder provides fast and easy means of removing mullion from opening

- Features :**
- Heavy Duty Steel construction
 - Easy removal when full width of an opening is required
 - Self locking when reinstalled without needing the key
 - Flush side mounted cylinder is not visible from front
 - Includes 1/8" adjustment shim for fine tuning fitment
 - Increases Security & Minimizes door sag and warpage

Mullion Tube : 2" Wide x 3" Depth x 1/8" Steel

Top/Btm. Retainers : Investment Cast Steel

Headcap : Steel with zinc dichromated internal parts

Lengths : 7', 8' & 10' lengths - can be cut to length in field

Cylinders : 1 1/8" Mortise Cyl. w/ std. cam (included) - 6 Pin, C Kwy, w/ 2 Keys

Optional Cylinders : 1 3/8" Mortise Cyl for 6 or 7 pin Small format IC core (less core)
11 Popular competitor keyways available w/ replacement cylinders

Finishes : AL Painted (Prime Coat)

Accessories : Stabilizers, Wall mounted storage kits, Filler blocks & Angle brackets

Warranty : Limited Lifetime Warranty



211 Endeavor Drive - PO Box 680
Rogersville, MO 65742
PH 877-258-1262 FX 877-888-0150
www.designhardware.net