


KIL Trim Key in Lever Trim



Specifications

- ANSI :** ANSI A156.3, Grade 1
- ADA :** Meets ADA requirements ANSI A117.1
- Construction :** Steel, Zinc Dichromated Chassis with Secure Thru Bolted design
- Application :** Standard Duty lever trim option for 1000R & 2000R
(Not recommended for SVR devices, Heavy Duty LE trim recommended)
- Door Prep :** Installs in 2 1/8" 161 door prep
- Actuator :** Cross shaped stainless steel
- Lever :** 5" Solid Zinc Diecast lever - 2 7/8" total projection
- Lever Designs :** Flat (standard, shown above) Curved, Half Curved, S-A & S-B (available with lever kits)
- Rose :** 3 3/8" Wrought Brass Roses
- Handing :** Non-Handed Completely Reversible
- Door Thickness :** 1 3/4" standard - available for 2" thick doors, specify when ordering
- Functions :** Passage, Storeroom & Entry
- Cylinder Options :** 6 Pin Brass, C Kwy, with 2 Keys std., Prepared for Small format IC core (less core)
- Optional Keyway :** 11 Popular competitor keyways available with replacement cylinders
- Finishes :** US3, US4, US10B, US26, US26D
- Warranty :** Limited Lifetime Warranty

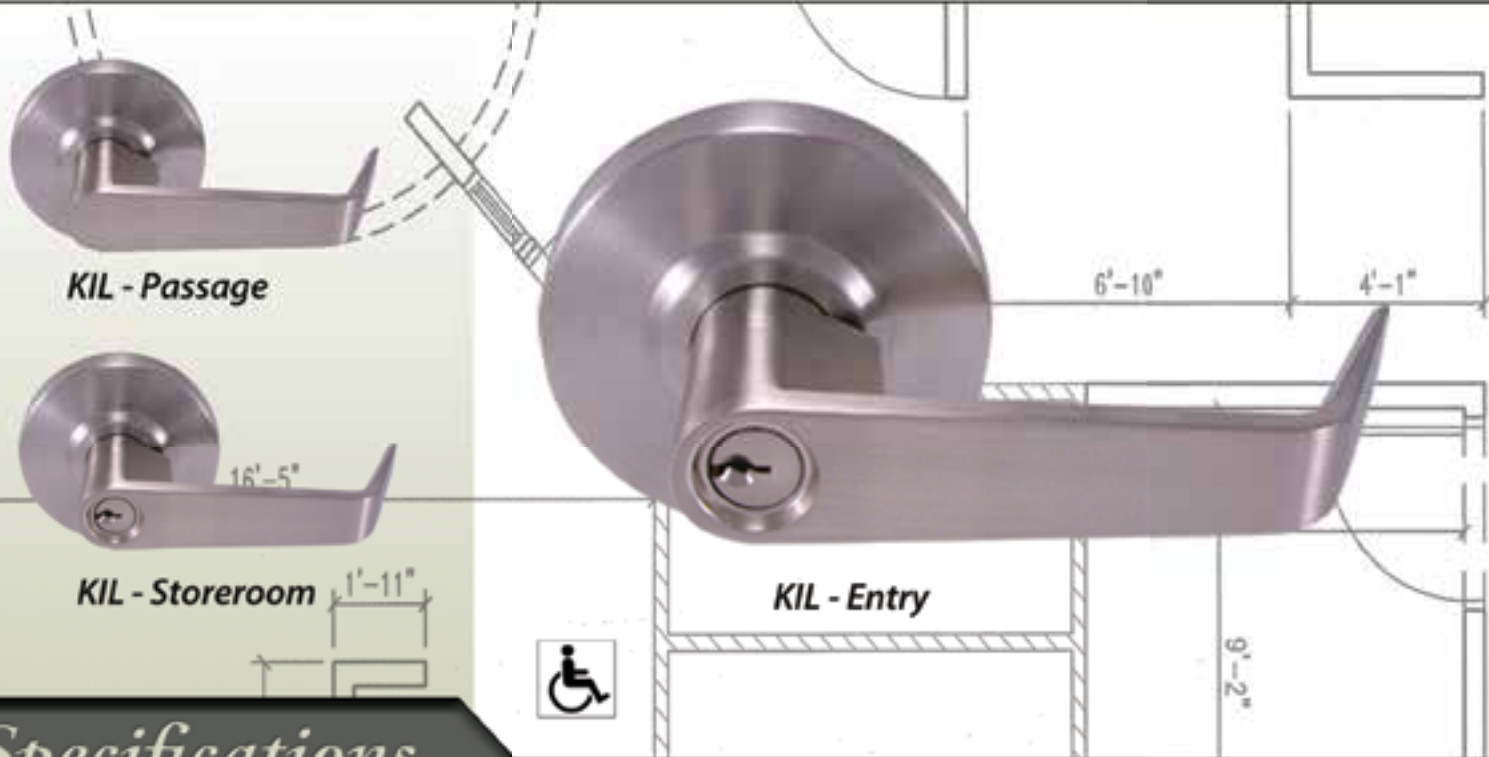

KIL - Storeroom IC



KIL - Entry IC



211 Endeavor Drive - PO Box 680
Rogersville, MO 65742
PH 877-258-1262 FX 877-888-0150
www.designhardware.net