
### W Series Grade 2, medium-duty cylindrical

lever and knob locks

Whether your application is government/military, retail, industrial or multi-family, there's a W Series lock that fits perfectly. With two popular lever and knob styles as well as two popular rose diameters (large and small), Falcon W Series can match most commercial door trim. The Falcon W Series locks feature conventional cylinders and small format interchangeable cores that are compatible with SFIC products from other manufacturers. Our conventional cylinders are available in all Falcon conventional key sections as well as Schlage C keyway, which we now masterkey across the complete Falcon product line. The Falcon W Series offers quality product at a value price, and is backed by one of the best names in the business - Allegion.

Features

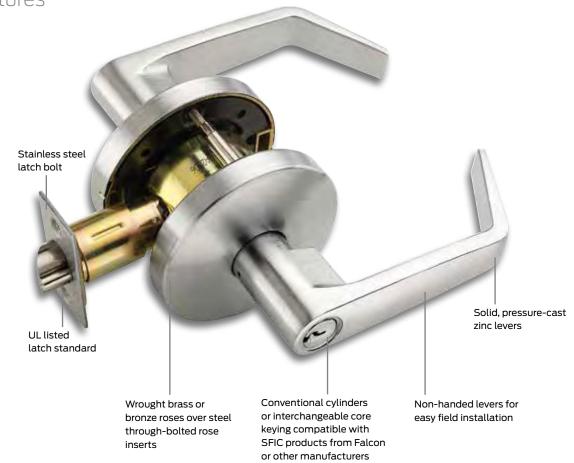

Glossary and finish chart

**MA Series** 

**RU Series** 

T Series

X Series

K Series

**B** Series

W Series

H2 Series

**D** Series

### W Series

### Features - standard rose

Door thickness: 1<sup>3</sup>/<sub>8</sub>" to 1<sup>3</sup>/<sub>4</sub>" standard.

**Backset:** 2<sup>3</sup>/<sub>4</sub>" standard; 2<sup>3</sup>/<sub>8</sub>" also available.

**Mechanism:** Parts constructed of brass or cold-formed steel, zinc plated and dichromated for rust resistance. Springs are stainless steel.

**Attachment:** Lock chassis secured to door by two screws which pass through a steel rose insert inside and thread directly into the outer rose-mounting assembly, and two screws that screw into the chassis assembly.

Handing: Locks are non-handed.

**Cylinder:** Pinning in six chambers. Cylinder assemblies removable to re-key. Also available with 6- or 7-pin interchangeable core cylinders. Cylinder housings and plugs machined from solid brass. Springs are stainless steel. Two nickel silver keys furnished standard.

**Competitor cylinder:** The W Series accepts standard 6-pin cylinders available from Falcon, as well as Schlage. There are other options available for competitor cylinders including, Corbin-Russwin, Yale and Sargent.

**Keyways:** "G" keyway standard on Falcon standard cylinders. "A" keyway standard on I/C core cylinders. Also available with some optional keyways. Schlage "C" keyway also available on standard cylinders, includes master key. Master keying available on all Falcon and Schlage "C" keyways.

**Trim:** Roses are heavy wrought brass or bronze, installed over steel rose inserts which are through-bolted through door. Levers are pressure-cast zinc (solid levers-no-inserts) finished to match mating parts.

**Latches:**  $\frac{1}{2}$ " bolt projection made of stainless steel and UL listed for 3-hour door assemblies. Latches have self-adjusting fronts to accommodate beveled or flat doors.  $2^{3}/_{8}$ " backset with 1" x  $2^{1}/_{4}$ " latch faces or  $2^{3}/_{4}$ " backset with  $1^{1}/_{8}$ " x  $2^{1}/_{4}$ " latch faces.

**Strikes:**  $4^{7}/_{8}$ " x  $1^{1}/_{4}$ " ANSI strike with curved lip to meet ANSI A115.2 door frame preparation standard. Consult Options and Accessories section for other available strikes, sizes and configurations.

**Screws:** Furnished with combination screws for use in wood or metal doors and frames.

**ANSI/BHMA:** Meets ANSI/BHMA A156.2, Series 4000, Grade 2.

Features - small rose

Door thickness: 1<sup>3</sup>/<sub>8</sub>" to 1<sup>3</sup>/<sub>4</sub>" standard.

**Backset:** 2<sup>3</sup>/<sub>8</sub>", 2<sup>3</sup>/<sub>4</sub>" standard.

**Mechanism:** Parts constructed of brass or cold-formed steel, zinc plated and dichromated for rust resistance. Springs are stainless steel.

Attachment: Lock chassis secured to door by two screws which pass through a steel rose insert inside and thread directly into the outer rose-mounting assembly, and two screws that screw into the chassis assembly.

Handing: Locks are non-handed.

**Cylinder:** Pinning in six chambers. Cylinder assemblies removable to re-key. Also available with 6- or 7-pin interchangeable core cylinders. Cylinder housings and plugs machined from solid brass. Springs are stainless steel. Two nickel silver keys furnished standard.

**Competitor cylinder:** The W Series accepts standard 6-pin cylinders available from Falcon, as well as Schlage, Corbin-Russwin, Yale and Sargent.

**Keyways:** "G" keyway standard on Falcon standard cylinders. "A" keyway standard on I/C core cylinders. Also available with some optional keyways. Schlage "C" keyway also available on standard cylinders, includes master key. Master keying available on all Falcon and Schlage "C" keyways.

**Trim:** Roses are heavy wrought brass or bronze, installed over steel rose inserts which are through-bolted through door. Levers are pressure-cast zinc (solid levers-no-inserts) finished to match mating parts.

**Latches:**  $\frac{1}{2}$ " bolt projection made of stainless steel and UL listed for 3-hour door assemblies. Latches have self-adjusting fronts to accommodate beveled or flat doors.  $\frac{2}{4}$ " backset with  $\frac{1}{8}$ " x  $\frac{2}{4}$ " latch faces.

**Strikes:**  $4^{7}/_{8}$ " x  $1^{1}/_{4}$ " ANSI strike with curved lip to meet ANSI A115.2 door frame preparation standard. Consult Options and Accessories section for other available strikes, sizes and configurations.

**Screws:** Furnished with combination screws for use in wood or metal doors and frames.

**ANSI/BHMA:** Meets ANSI/BHMA A156.2, Series 4000, Grade 2.

UL: 3-hour A label.

UL: 3-hour A label.


### W Series

### Specifications


#### Key-in-lever cylindrical locksets shall be Falcon W Series or equal and meet the following requirements:

- All locks shall meet ANSI/BHMA A156.2, Series 4000, Grade 2 test requirements for key-in-lever locksets.
- Locksets shall be UL Listed 3-hour, A Label.
- Lever trim shall have individual heavy-duty springs for lever return and to prevent lever sag. Trim shall be through-bolted.
- All lever designs shall be solid (no inserts) and meet the federal ADA and state disability requirements.
- Locksets shall adjust to fit door thickness from 1 3/8" to 1 3/4".
- . All locksets shall be non-handed and not require field disassembly for re-handing.
- Preparation for door must be non-handed. Acceptable manufacturer: Falcon lock

### Standard rose template

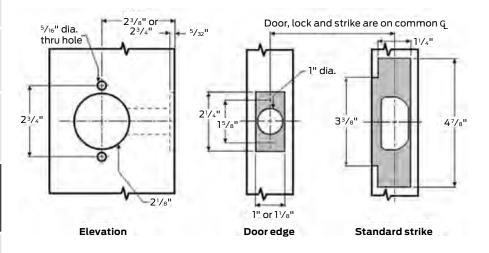

### Small rose template

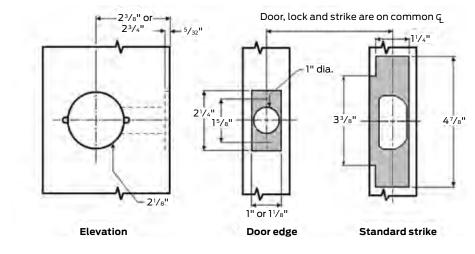

finish chart


≥

H2 Series

**D** Series

Series K900

**Construction keying** and product ID chart Levers are solid pressure cast zinc, finished to match mating parts. Roses are wrought brass or bronze installed over steel through-bolted rose inserts. A spring-loaded retainer secures levers. Secure side retainer cannot be depressed without a key that operates the lock.

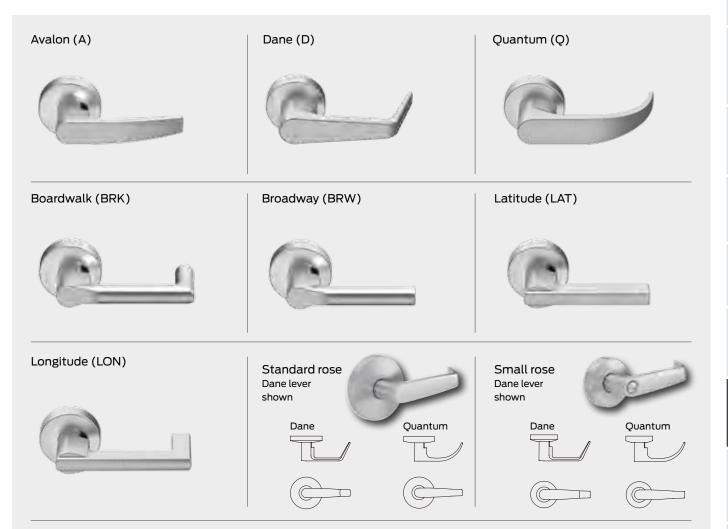

### Abrasive lever options


Dane, and Quantum levers are available with an abrasive strip along the length of the lever to identify entrances to areas hazardous to the disabled. To order add 6 (for example, 6DA for Dane lever or 6QU for Quantum lever) to the order number.

### Trim finishes chart


Description	ANSI No.	Availability
Bright brass	605	All trim
Satin brass	606	Not on small rose
Oil rubbed bronze	613	All trim
Satin nickel	619	All trim
Matte black	622	All trim
Bright chrome	625	All trim
Satin chrome	626	All trim
Aged bronze	643e	All trim

**Construction keying** 

Knobs are constructed of brass or cold-formed steel and are zinc-plated and dichromated for rust resistance. Springs are stainless steel. Roses are heavy-wrought brass or bronze, installed over wrought steel reinforcing plates. Knobs are brass or bronze, secured by a steel knob retainer, which cannot be depressed when lock has been locked.

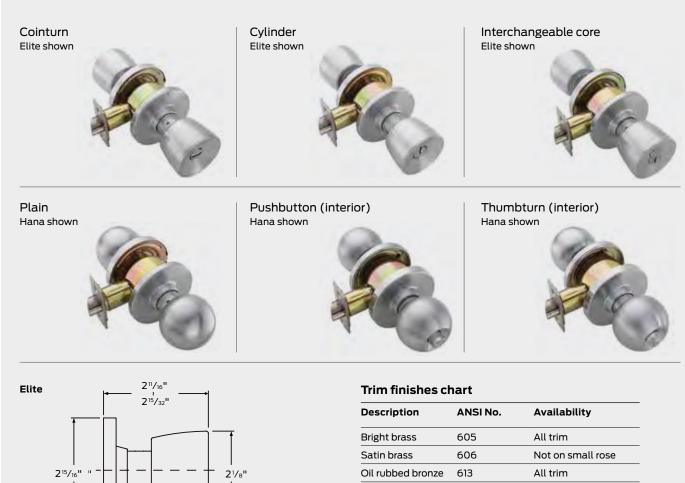

**Glossary and** finish chart



Description	ANSI No.	Availability
Bright brass	605	All trim
Satin brass	606	Not on small rose
Oil rubbed bronze	613	All trim
Bright chrome	625	All trim
Satin chrome	626	All trim

## Lever functions

Catalog number	Function	Name	Description	ANSI no.
*W101		Passage/ closet set	Latch bolt by levers at all times.	F75
*W161		Communicating/ exit lock	Deadlocking latch bolt by inside lever. Non-removable blank plate outside. Inside lever is always free.	
 W201		Patio lock	Deadlocking latch bolt by levers. Outside lever is locked by push button from inside. Rotating inside lever or closing door releases button and unlocks outside lever.	F77
*W301		Privacy lock	Latch bolt by levers. Outside lever is locked by push button on inside lever. Rotating inside lever or closing door releases push button and frees outside lever. Inside lever is always free. Emergency release in outside lever unlocks door.	F76
W501		Entry lock	Push button locking. Button on inside locks outside lever until unlocked by key or by rotating inside lever. Closing door release push button and unlocks door. Inside lever always free. Deadlock latchbolt.	F82
*W511 (		Entry/office lock	Deadlocking latch bolt by levers. Turn/push button locking. Pushing and turning button locks outside lever, requiring use of a key for unlocking the door until button is manually unlocked. Pushing button locks outside lever until unlocked by key or by rotating inside lever. Inside lever is always free.	F109
*W561 (		Classroom lock	Deadlocking latch bolt by levers. Outside lever is locked by key in outside lever. Inside lever is always free.	F84
*W571 (		Corridor lock	Deadlocking latch bolt. Push Button Locking. Button on the inside locks outside lever until unlocked by key or by rotating inside lever. Closing the door releases button. Inside lever always free. <sup>1</sup>	
*W581 (		Storeroom lock	Deadlocking latch bolt by lever inside or key outside. Outside lever is always locked. Inside lever is always free.	F86
W711		Apartment entrance lock	Deadlocking latch bolt by levers. Turn/push button locking. Pushing and turning button locks outside lever, requiring use of a key for unlocking the door until button is manually unlocked. Pushing button locks outside lever until unlocked by key, by rotating inside lever, or by closing the door. Inside lever is always free.	
*W12	S.	Single dummy	Single trim, surface-mounted rigid lever.	
*W18		Double dummy	Double trim, surface-mounted rigid levers.	

Glossary and finish chart

**MA** Series

**RU** Series

**T** Series

X Series

**K** Series

**B** Series

W Series

H2 Series

**D** Series

K900 Series

<sup>1</sup> This lock will unlock when the door is closed. If you want your door to remain locked when it closes, please purchase the 501 function.

# Knob functions

	Description	Description	ANSI no.
-	Passage/closet set	Latch bolt by knob at all times.	F75
-8-	Privacy lock	Latch bolt by knobs. Outside knob is locked by push button on inside knob. Rotating inside knob or closing door releases push button and frees outside knob. Inside knob is always free. Emergency release in outside knob unlocks door.	F76
	Entry lock	Push button locking. Button on inside locks outside knob until unlocked by key or by rotating inside knob.	F82
	Entry/office lock	Deadlocking latch bolt by knobs. Turn/push button locking. Pushing and turning button locks outside knob, requiring use of a key for unlocking the door until the button is manually unlocked. Pushing button locks outside knob until unlocked by key or by rotating inside knob. Inside knob is always free.	F109
••••	Classroom lock	Deadlocking latch bolt by knobs. Outside knob is locked by key in outside knob. Inside knob is always free.	F84
	Corridor lock	Deadlocking latch bolt. Push button locking. Button on the inside locks outside lever until unlocked by key or by rotating inside lever. Closing the door releases button. Inside lever always free. <sup>1</sup>	
••••	Storeroom lock	Deadlocking latch bolt by knobs. Outside knob is always locked. Inside knob is always free.	F86
	Apartment entrance lock	Deadlocking latch bolt by knobs. Turn/push button locking. Pushing and turning button locks outside knob, requiring use of a key for unlocking the door until the button is manually unlocked. Pushing button locks outside knob until unlocked by key, by rotating inside knob, or by closing the door. Inside knob is always free.	
	Single dummy	Single trim, surface-mounted rigid knob.	
		set Privacy lock Privacy lock Entry lock Entry lock Entry office lock Classroom lock Cassroom lock Corridor lock	Set   Image: Set Set   Image: Set Set   Image: Set


# Cylinders and competitor keyways

#### Falcon standard cylinders - 6-pin

Catalog number	Description
Q330-154	Falcon (specify keyway)
Q330-155	Falcon (for W561)

Note: Specify finish: 606 or 626


Specify keyway: G (standard), H, K, L, N, P



#### Falcon interchangeable core

Catalog number	Description
C606 (6-pin), C607 (7-pin)	For use in all I/C keyed locks (cover style)
CB806 (6-pin), CB807 (7-pin)	For use in all I/C keyed locks (cap style)

Note: Specify finish: 606 or 626 Specify keyway: A (standard) or other keyway




### Standard cylinders with other keyways - 6-pin

Catalog number	Description
Q330-152	Schlage C
Q330-153	Schlage C for W561
Q330-166	Corbin 60 (0 bit or KD only)
Q330-167	Corbin 60 (0 or KD only) for W561
Q330-210	Russwin D1 (0 bit or KD only)
Q330-211	Russwin D1 (0 bit or KD only) for W561
Q330-158	Cor/Russ L4 (0 bit or KD only)
Q330-159	Cor/Russ L4 (0 bit or KD only) for W561
Q330-160	Sargent LA (0 bit or KD only)
Q330-161	Sargent LA (0 bit or KD only) for W561
Q330-164	Tailpiece for Q330-154 Falcon and Schlage cylinders (All other functions)
Q330-165	Tailpiece for Q330-155 Falcon and Schlage cylinders (W 561 function only)
Q330-168	Tailpiece for SFIC (All functions)
Q330-156	Yale 8 (0 bit or KD only)
Q330-169	Tailpiece for W Lock knobs — SFIC

Note: Construction keying available. Reference page 101 for more information.



**Q330-164** Conventional cylinder tailpiece





Glossary and finish chart

# finish chart

Series

K900

Latches and strikes


### Latches

- Latches for W Series locks are 3-hour UL listed •
- 2<sup>3</sup>/<sub>4</sub>" backset standard, 2<sup>3</sup>/<sub>8</sub>" backset optional
- Unless otherwise specified we furnish a 1" x 2 1/4" square corner faceplate on 2 3/8" backset latches, н. and a 1  $\frac{1}{8}$  x 2  $\frac{1}{4}$  square corner faceplate on 2  $\frac{3}{4}$  backset latches


### 1/2" Projection, UL listed, stainless steel bolt

Catalog number	Description (functions)	Faceplate size	Corner
Q330-192	2 <sup>3</sup> /4" backset dead locking (201, 711, 501)	1" x 2 1/4"	Square
Q330-193	2 <sup>3</sup> /4" backset dead locking (201, 711, 501)	1" x 2 1/4"	Radius
Q330-194	2 <sup>3</sup> /4" backset dead locking (201, 711, 501)	1 1/8" x 21/4"	Square
Q330-195	2 <sup>3</sup> /4" backset dead locking	1" x 2 1/4"	Square
Q330-196	2 <sup>3</sup> /4" backset dead locking	1" x 2 1/4"	Radius
*Q330-197	2 <sup>3</sup> /4" backset dead locking	1 1/8" x 2 1/4"	Square
Q330-198	2 <sup>3</sup> /8" backset dead locking (201, 711, 501)	1" x 2 1/4"	Square
Q330-199	2 <sup>3</sup> /8" backset dead locking (201, 711, 501)	1" x 2 1/4"	Radius
*Q330-200	2 <sup>3</sup> /8" backset dead locking (201, 711, 501)	1 1/8" x 2 1/4"	Square
Q330-201	2 <sup>3</sup> /8" backset dead locking	1" x 2 1/4"	Square
Q330-202	2 ³/8" backset dead locking	1" x 2 1/4"	Radius
*Q330-203	2 <sup>3</sup> /8" backset dead locking	1 <sup>1</sup> /8" x 2 <sup>1</sup> /4"	Square
Q330-204	2 <sup>3</sup> /4" backset spring latch	1" x 2 1/4"	Square
Q330-205	2 ³/₄" backset spring latch	1" x 2 1/4"	Radius
*Q330-206	2 ³/₄" backset spring latch	1 <sup>1</sup> /8" x 2 <sup>1</sup> /4"	Square
Q330-207	2 ³/8" backset spring latch	1" x 2 1/4"	Square
Q330-208	2 ³/8" backset spring latch	1" x 2 1/4"	Radius
*Q330-209	2 <sup>3</sup> /8" backset spring latch	1 <sup>1</sup> /8" x 2 <sup>1</sup> /4"	Square












11/2

\*Available as small rose

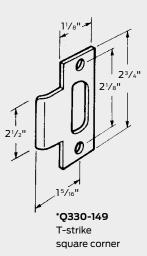



Q330-150 Full lip, 1/4" radius corner



Q330-151 Full lip, square corner

### Function and trim style cross-reference

### W Series grade 2 cylindrical

ANSI number/grade	Function	Falcon	Arrow	Corbin/ Russwin	Dorma	Hager	Yale
F75	Passage	W101	RL/RLX/MLX01	CL3810	CL710	2510	4601LN
F111	Comm/exit	W161	RL03	_	CL725	-	4628LN
F77	Patio	W201	_	CL3840	CL730	-	_
F76	Privacy	W301	RL/RLX/MLX72	CL3820	CL740	2540	4602LN
F109	Entry/office	W511	—	CL3851	CL753	2550	4607LN
F84	Classroom	W561	RL/RLX/MLX17	CL3855	CL770	2570	4607LN
F86	Storeroom	W581	RL/RLX/MLX12	CL3851	CL780	2580	4605LN
	Apartment entry	W711	_	_	_	_	_
	Single dummy	W12	RL/RLX/MLX08	CL3850	CL701	2517	4655LN
F82	Entry	W501	RL/RLX/MLX11	CL3861	CL750	2553	4604LN

#### **Trim styles**

Augusta Pacific Beach Monroe —	NZD PZD —	LR LC LG —	Withnell Archer —	
	PZD — —		Archer —	
Monroe —		LG —	_	
_	-	_	_	
-	-	_	_	
-	-	-	-	
_	-	_	_	
-	-	_	-	
Carolina	_	_	_	
	— — Carolina	  Carolina _		-   -   -   -     -   -   -   -   -     Carolina   -   -   -   -

All effort has been made to make this information comprehensive. Since no two products are exactly alike, this data represents those products which are similar. This information was obtained from trade services and is not guaranteed nor meant to represent any product as equal to any other product.

\_\_\_\_

K900 Series