

Trim Selection




CLUTCH CYLINDRICAL LEVER

Non-handed Grade 1 (Clutch Style)


Cylindrical body hardened steel heavy duty tailpiece. For 1 3/4" and 2 1/4" doors. Prefix "THI" before Part # for 2 1/4" door thickness. Available for fire and non-fire rated rim and vertical rod exit devices.

Rose diameter 3 1/2", lever length 4 3/4". Fits and covers 161 cutout.

Finishes: Architectural plated finishes.

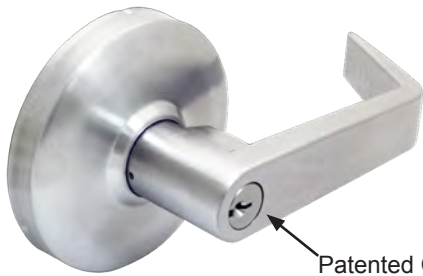

Patented Clutch Freewheeling



- ENT00L or
- ICENT00L or
- ICSCENT00L4
- SARICENT00L (Sargent)
- RUSICENT00L (Corbin / Russwin)
- YALICENT00L (Yale)
- 8000K

- ENTRANCE**
Key locks and unlocks lever. Operates as CLASSROOM FUNCTION.
ANSI Function – 08
Ball Knob Keylock

- STR05L or
- ICSTR05L or
- ICSCSTR05L4
- SARICSTR05L (Sargent)
- RUSICSTR05L (Corbin / Russwin)
- YALICSTR05L (Yale)

- STOREROOM**
Key operates lever, otherwise always locked.
ANSI Function – 04

PAS30L

- PASSAGE**
Trim always operable and free.
ANSI Function - 15

DUM40L

- DUMMY**
Dummy trim. One sided
ANSI Function – 10

When ordering "AT" and "SPA" designs, prefix design name before Part #. Example: ENT00L in "AT" is **ATENT00L**.


KEYWAY: 6-Pin solid brass "C" keyway standard. Optional: Schlage E, Schlage C-K, Russwin D1-2-3-4, Corbin 59/60, Sargent LA-LB-LC, Falcon/Weiser E, Arrow A, Yale 8, Yale GA and Kwikset. Can also accept Medeco, Assa, Kaba and **Cal-Royal HSK** High Security Cylinders.

- **(IC) INTERCHANGEABLE CORE:** Interchangeable Core locks will accept compatible 6 or 7-Pin cores with BEST, FALCON and ARROW
- **(ICSC) INTERCHANGEABLE CORE:** Indicates function available with
- **Schlage Full Size Format** Interchangeable Core. Corbin, Sargent and Yale format also available.


Other Lever Trim Designs




TUB DESIGN



AT DESIGN



SPA DESIGN



8000K

