



Low Profile Lite Kit with Superlite X-90 Glass and GT-316 Glazing Tape

L-FRASP-X90-PK



Fits 1-3/4" Thick Doors

Materials & Finishes

- 18 ga. cold rolled steel
- Mitered and welded corners
- Welded reinforcing clips at corners
- Counter-sunk mounting screw-holes
- #8 Phillips head SMS
- Gray Primer (GPZ) powder coat finish

Available Options

- Powder coat color options - see color chart on www.ngp.com
- Torx Security Screws
- Galvanneal - A40 Steel
- Zinc electro-plating
- Lead lining - .030" thick

90 Minute Fire Protective Glass Superlite™ X-90



Material

- 3/4" thick fire protective, safety rated glass
- Superior optical clarity – clear and wireless
- Economical fire and safety rated glass
- Etched with Intertek/Warnock-Hersey listing on each piece
- Manufactured in USA
- Lifetime Manufacturer Warranty
- Weight: 9 lbs./sq. ft.
- STC 38 rating

Fire-Rating Information:

- ANSI/UL10B, ANSI/UL10C, CAN/ULC-S104 with closed cell PVC foam glazing tape like NGP GT-116

Impact Safety Rating Information:


Meets ANSI Z97.1, Class B
Meets CPSC 16CFR 1201 (Category I)
Complies with IBC requirements for use in doors

SIZES AVAILABLE

- 12" x 12"
- 5" x 35"
- 6" x 27"
- 7" x 22"




Project:
Submitted by:
Date:
Notes:

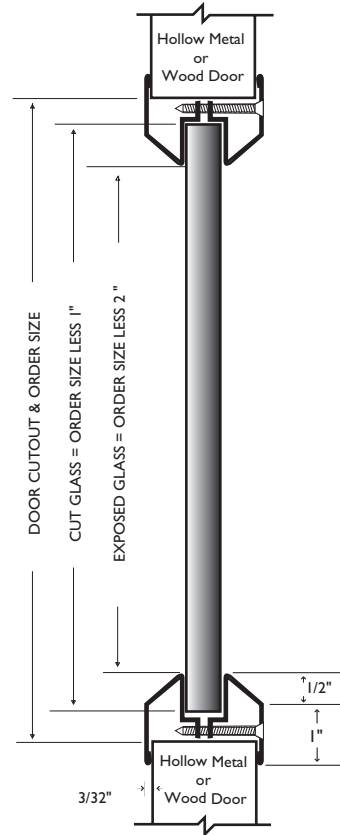

Closed Cell PVC Foam Glazing Tape

GT-316 3/8" wide x 3/16" thick

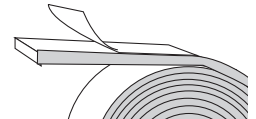

Material

Closed cell PVC Foam glazing tape with adhesive both sides.

- Color is black
- For use in lite kits on UL10C positive pressure fire-rated wood or steel doors rated up to: 90 minutes with SuperLite™ X-90