

SI AI-250-PDKIT

Aluminum Sliding Door Hardware — Pocket Door Frame Kit

BHMA

PRODUCT CUT SHEET

Top Mount Track System

- ◆ Commercial Grade for 1¾" To 1¾" Doors
- Max Weight Load 250 lbs.
- ANSI/BHMA A156.14 Grade 1 Certified to 100,000 Cycles Including Soft Close Feature
- Hangers with Heavy Duty Ball Bearing Wheels
- 5-year Warranty
- Patent Pending


SKU	APPLICATION	FOR UP TO:
SLAL-250-PDKIT	4" Wood or Metal Stud	3/0 x 7/0
SLAL-250-PDKIT-48"DR	4" Wood or Metal Stud	4/0 x 7/0
SLAL-250-PDKIT-6	6" Wood Stud (5½" Header)	3/0 x 7/0
SLAL-250-PDKIT-6-48"	6" Wood Stud (5½" Header)	4/0 x 7/0
SLAL-250-PDKIT-6M	6" Metal Stud (6" Header)	3/0 x 7/0
SLAL-250-PDKT-6M-48"	6" Metal Stud (6" Header)	4/0 x 7/0

Order two sets for Bi-Parting applications

OPTIONS:


- Soft Close / Open Specify "SC" For Both Directions Order SCBY
- Wall Mounted Bottom Guide SL-WG
- Bottom Channel Guide SL-BCG (Page SL12)
- Adapter Kit Used with SLAL-250-PDKIT and SLAL-250-PDKIT-48"DR When Installing 13/4" Thick Doors "SLAL-134-KIT"
- SLAL-250-PDKIT-48"DR comes with 6 split studs. SLAL-134-KIT comes with 4 spacers and 2 floor plates. Be sure to order enough SLAL-134-KIT for 6 split studs per opening
- Onverging Kit Used to Join Headers in Bi-Part Openings "SLAL-CNVG-KIT"





Complete Kits Include:

- (1) Header Track Assembly (1) Universal Hardware Pack,
- Consists Of: (2) Ball Bearing Heavy Duty Hangers
- (2) Snap-In Door Brackets
- (2) In-Track Stops
- (1) Angle Stop
- (1) Bumper Stop
- (1) Door Guide
- Heavy Duty Floor Guides
- (1) Pocket Frame Kit
- Jamb Stiffeners
 - (4) 36" Openings (6) 48" Openings
- Floor Brackets
- (2) 36" Openings (3) 48" Openings
- (1) End Bracket

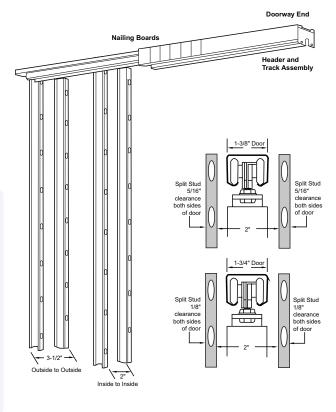

Note: For Door Sizing Refer to Installation Instruction.

NGP-SLI-SLAL-250-PDKIT-PCS-1122-C

NGP MEMPHIS

4985 East Raines Road Memphis, TN 38118 orders@ngp.com

NGP VEGAS

