

80 SERIES RIM EXIT DEVICE INSTRUCTION SHEET FOR APPLYING THE 814 "S" SERIES TRIMS

ATTENTION:

FOR PROPER TRIM INSTALLATION USE EXIT DEVICE INSTRUCTION SHEET AND TEMPLATE(S). THESE INSTRUCTIONS ARE FOR APPLYING 814 PULLS TO 8888/8810 AND 8804 CHASSIS WITH "FIGURE 8" MOUNTING HOLES (MANUFACTURED AFTER FEB. 12, 2001).

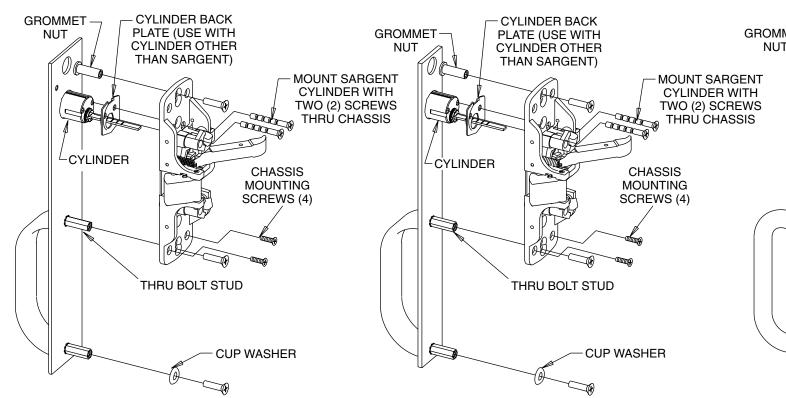

814-FSL

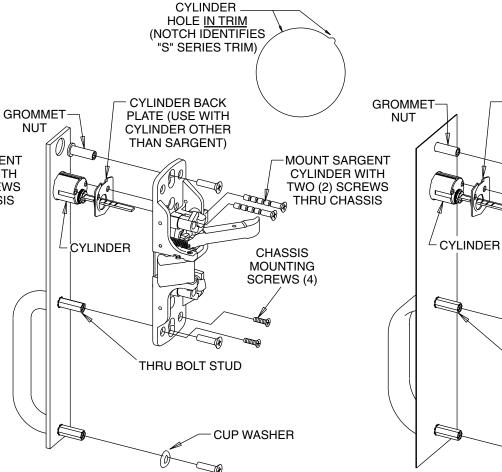

814-FSW

SARGENT

ASSA ABLOY

MOUNT SARGENT

CYLINDER WITH

TWO (2) SCREWS

THRU CHASSIS

814-PSB **SARGEN**

814-MSL

CUP WASHER

"FIGURE 8"-HOLE

100000

CHASSIS MOUNTING

SCREWS (4)

CYLINDER BACK

PLATE (USE WITH

CYLINDER OTHER

THAN SARGENT)

THRU BOLT STUD