


# RCI Electric Strikes



## How To Order



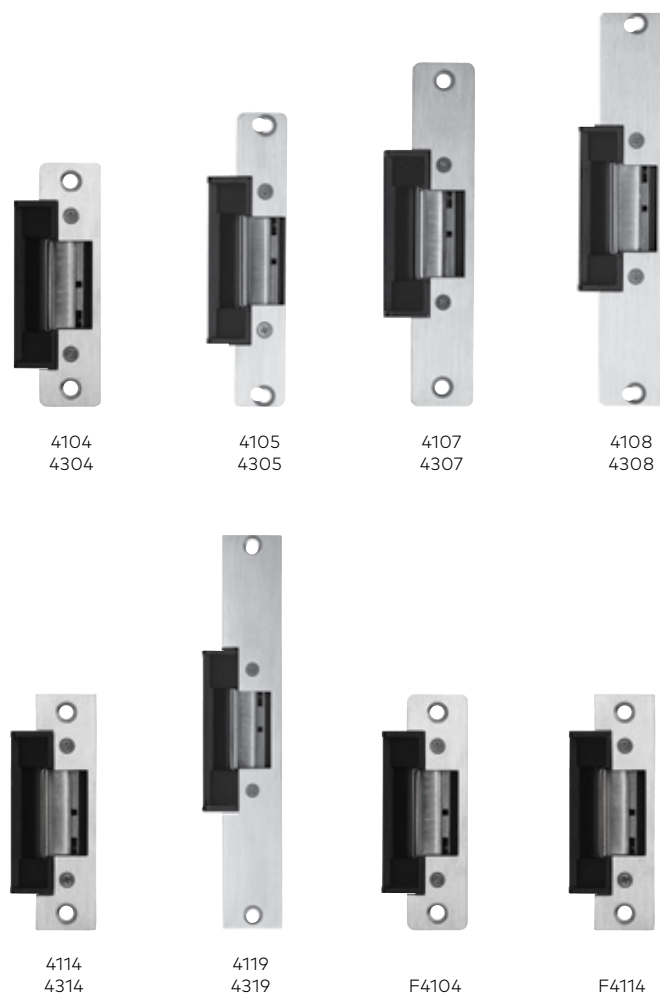



Options				Voltage				
Fire-Rated <sup>4</sup>	F	Fail-Secure		11-16VAC—	01			
				12VAC/VDC—	05			
				24VAC/VDC—	08			
			Fail-Safe		12VDC—	06		
					24VDC	09		
	4			-		x	32D	
Mode	Fail-Secure	1	04	-1-1/4"W x 4-7/8"H (32mm x 124mm), ANSI Radius Corner				
	Fail-Safe	3	05	-1-1/8"W x 5-7/8"H (29mm x 150mm), Radius Corner				
			07	-1-1/4"W x 6-7/8"H (32mm x 175mm), Radius Corner				
			08	-1-7/16"W x 7-15/16"(37mm x 202mm), Radius Corner				
			14	-1-1/4"W x 4-7/8"H (32mm x 124mm), ANSI Square Corners				
			19	-1-3/8"W x 9"H (34mm x 228mm), Square Corners				
Faceplate								

Example: **F4104-05 x 32D**

## 4 Series

# Centerline Strikes

Accommodates 3/4" (19mm) latch projection. Various faceplate options available to accommodate most frame types.  
Insert Depth: 1-1/2"D (38mm)

	Energy 200mA <sup>1</sup> (see How to Order chart below)		Strength 1,500lbf Static <sup>2</sup> 70ft-lb Dynamic
	Warranty 5 Year Limited Warranty		Mode Fail-Secure & Fail-Safe
	Endurance 500,000 Cycles <sup>3</sup>		Fire-Rated Optional 1-1/2-Hour Models Available <sup>4</sup>

<sup>1</sup>At 12VDC

<sup>2</sup>1,500lbf Static for fire-rated models, 1,000lbf for non-fire-rated 04 & 14 faceplates, 500lbf for 05, 07, 08 & 19 faceplates.

<sup>3</sup>Fire-rated (F) models only, 250,000 for other models

<sup>4</sup>Fire-rated (F) models only available in fail-secure mode with 04 & 14 faceplates.

- Accommodates 3/4" (19mm) latch projection
- 1-1/2" (38mm) cut-out depth accommodates most door frame material types
- Use with wide range of door thicknesses, 1-3/8" to 2-3/8" (35mm-60mm)
- Standard mounting tabs and fasteners included
- Non-handed
- Trim plate included to cover up irregular frame cutout
- Brushed Stainless Steel (32D) finish
- UL 1034 burglary-resistant Listed
- UL 10C, 1-1/2-hour fire-rating Listed<sup>4</sup>
- CAN/ULC S104, 1-1/2-hour fire-rating Listed<sup>4</sup>
- Certified to ANSI/BHMA standard A156.31, Grade 1, endurance 500,000 cycles<sup>3</sup> (F4 models only)

SECURITY



## Options

- F – 1-1/2-hour fire-rating Listed

## Accessories

Model	Description
4/7JIG	Standard profile frame prep jig, aluminum
LEK01	1" lip extension kit for retrofit applications, black finish
LEK02	2" lip extension kit for retrofit applications, black finish
LEK03	3" lip extension kit for retrofit applications, black finish (not available for F4)
SMT-01	Strike marketing template kit, aluminum
TP-47-5PK	Trim plates, 5 pack, black finish
930-LG	Standard profile latch guard, 32D finish