


Product Overview

The ALREX PRO Hydraulic Door-Closer Hinge redefines door control, blending hydraulic precision with spring-hinge reliability. Built for demanding environments, its stainless-steel design ensures smooth, code-compliant performance while preventing disruptive slams—now with UL 10C 3-hour fire-rated certification for commercial use. Hold Open available for non-fire rated openings.

Common Sets

Door Weight	Door Size	Closer Hinge / Free Swing Hinge
Up to 150 lbs	3'0" x 7'0"	2 Hydraulic / 1 Free Swing
Up to 200 lbs	3'0" x 7'0"	3 Hydraulic
Up to 200 lbs	3'0" x 8'0"	3 Hydraulic / 1 Free Swing
Up to 250 lbs	3'0" x 8'0"	4 Hydraulic
Up to 180 lbs	4'0" x 7'0"	3 Hydraulic
Up to 220 lbs	4'0" x 7'0"	3 Hydraulic / 1 Free Swing
Up to 200 lbs	4'0" x 8'0"	3 Hydraulic / 1 Free Swing
Up to 250 lbs	4'0" x 8'0"	4 Hydraulic

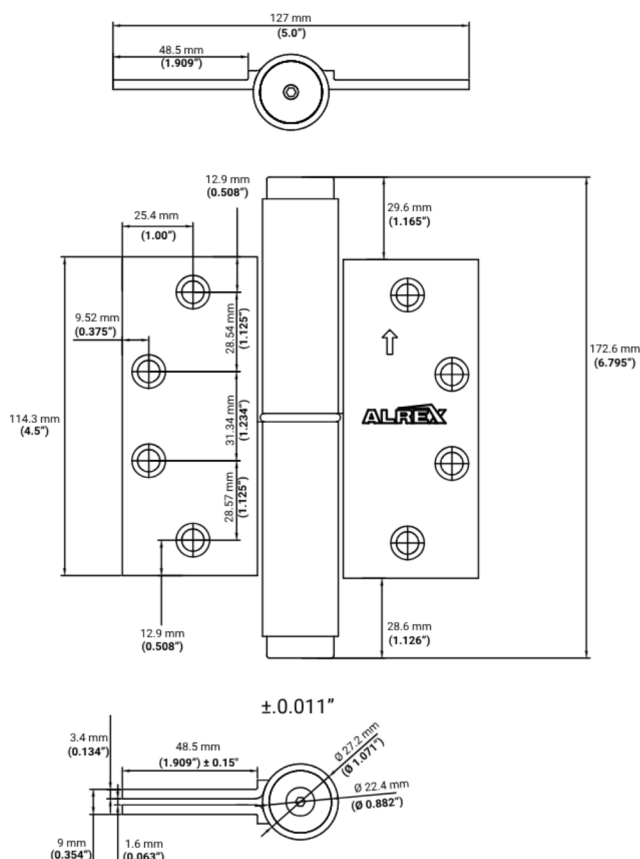

Features

- Hydraulic speed control with adjustable tension
- UL 10C 3-hour fire-rated (NFPA 80/ADA compliant)
- Stainless steel body with 1,000,000+ cycle durability
- Adjustable latching mechanism for secure closure
- Slim, architectural-grade profile

Applications

- Medical facilities
- Arched doors
- OEM/custom installations
- Hospitality environments
- Multi-family residences

Specifications

- Material: 304 Stainless Steel
- Operating Temp: -40°F to 212°F
- Gauge (4.0"): .130" | (4.5"/5.0"): .134"
- Hole Pattern: ANSI
- Hold Open Option Available

