

GENESYS

**INDCGN-20 SERIES - ANSI GRADE 1,
NON-CLUTCH **PRIVACY INDICATOR LEVERSET****



**Inside
Push Button**




GN DESIGN



**Red (IN USE) and
Green (VACANT)
Indicator**

For other lever designs,
replace **GN**, with design name.
Example: **INDCGN-20 U26D** in
"AUG" is **IND-AUG-20 US26D**

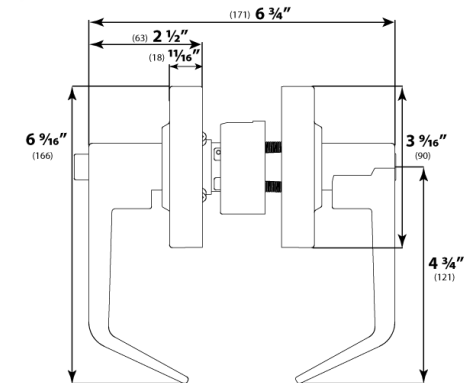

ALP DESIGN



AT DESIGN



SPA DESIGN



TUB DESIGN



AUG DESIGN



DAN DESIGN



LON DESIGN



TAC DESIGN

SPECIFICATIONS

GENERAL

Full length 4 3/4" lever handle with 3/8" return.
Rose diameter 3 9/16". Non-handed levers.
Concealed mounting screws.

APPLICATIONS

For offices, schools, hospitals, corrosive environments,
commercial and public buildings.

DOOR RANGES

For 1 3/8" to 1 3/4" thick doors. Specify door thickness upon ordering.

ANSI STANDARDS

Meets ANSI / BHMA A156.2 Series 4000, Grade 1 requirements.

STRIKES

ASA 1 1/4" x 4 7/8" standard. Other strikes available upon request.

TRIM

Thru-bolted assembly through door with separate spring cage for each lever.

HOUSING

Cold Rolled Steel and Zinc Dichromate finish for rust resistance
with precision cast steel retractor. 2 1/8" diameter bore.

LATCH FACEPLATE

Standard 2 1/4" x 1 1/8" for 2 3/4" backset.
Optional 2 1/4" x 1" for 2 3/8" backset.

LATCH OPTIONS

2 3/4" standard, brass with 1/2" throw. 2 3/8", 3 3/4" & 5" backset optional.
GND750 deadlatch reversible for flat and beveled door.
3/4" throw anti-friction deadlatch for pair of fire doors.

EMERGENCY SLOT on the outside trim to unlock door in case of emergency.