

Trim Selection




LEVER DESIGN

Non handed (Optional Clutch)

Tubular body hardened steel heavy duty tailpiece. For 1 3/4" doors. Available for fire and non-fire rated rim and vertical rod exit devices.

Rose diameter 3 1/2", lever length 4 3/4". Fits and covers 161 cutout.

Finishes: US26D, 10B, 3

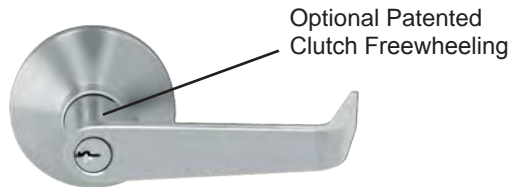

KNOB DESIGN

Non handed

Tubular body hardened steel heavy duty tailpiece. For 1 3/4" doors. Available for fire and non-fire rated rim and vertical rod exit devices.

Rose diameter 3 1/2". Fits and covers 161 cutout.

Finishes: US32D, 10B, 3



8000L ENTRANCE
Key locks and unlocks lever.
Operates as classroom function.
ANSI Function - 08

CLU5000L CLUTCH FREE WHEELING (ENTRANCE)
Key locks and unlocks lever.
Operates as classroom function.
ANSI function - 08


8000S STOREROOM
Key retracts latchbolt, otherwise always locked.
ANSI function - 04

8000PAS PASSAGE
Lever always operable and free.
ANSI function - 15

8000DUM DUMMY
Dummy trim. One sided.
ANSI function - 10

8000K ENTRANCE
Key locks and unlocks lever.
Operates as classroom function.
ANSI Function - 08

8000KSTR STOREROOM
Key retracts latchbolt, otherwise always locked.
ANSI function - 04

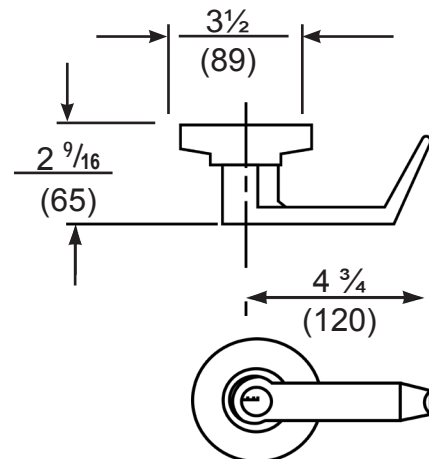

KEYWAY: 6-Pin solid brass "C" keyway standard. Optional: Schlage E, Schlage C-K, Russwin D1-2-3-4, Corbin 59/60, Sargent LA-LB-LC, Falcon/Weiser E, Arrow A, Yale 8, Yale GA and Kwikset. Can also accept Medeco, Assa, Kaba and **Cal-Royal HSK** High Security Cylinders.

PULL DESIGN

FOR RIM DEVICES ONLY

Outside by pull and key.
Key retracts latchbolt.
ANSI function - 03
Covers 161 cutout.

FINISHES

Powder Coated Aluminum (ALUM)

5000NL



5000DTP



Outside by pull only.
Pull when dogged.
ANSI function - 02
Covers 161 cutout.

5000EOP



Outside by plate only.
ANSI function - 10
Covers 161 cutout.